



## LUNIX 4K Flash update

1. Download the latest software from <https://www.tektronic.dk> or <http://www.qviart.com/es/qviart-soporte-es/qviart-descargas-es/viewcategory/40-lunix-4k-firmware>

Descargas

Overview Search Downloads Up

LUNIX 4K Firmware

Category: LUNIX 4K Firmware

Files:


ZIP Qviart LUNIX 4K 2.00 **UPDATED** (0 votes) [Download](#)

Firmware QVIART LUNIX 4K 2.00

Fecha de lanzamiento: 2019-01-09 08:22:35  
Tamaño: 2.44 KB  
Descargas: 20

Back

2. Unpack the file to a USB media

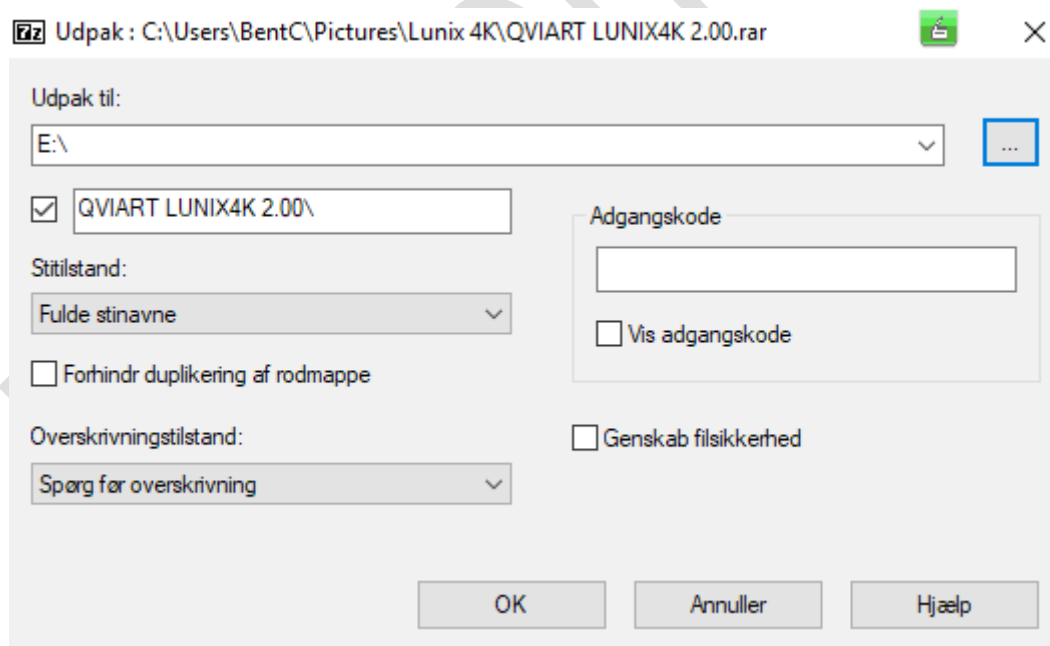

3. Check that the following folder is found on the USB media :

**Tektronic.dk**



Denne pc > STORE N GO (E:)

Navn	Ændringsdato	Type	Størrelse
update	23-01-2019 10:08	Filmappe	

4. Check for a folder called "lunix4K" and check that it contains files:

Denne pc > STORE N GO (E:) > update > lunix4k

Navn	Ændringsdato	Type	Størrelse
initrd_run	22-01-2019 13:55	Kodi	7.189 KB
oe_kernel	22-01-2019 13:55	Kodi	3.531 KB
reboot.update	22-01-2019 13:55	UPDATE-fil	0 KB
rootfs.tar.bz2	22-01-2019 13:55	BZ2-fil	89.525 KB
splash	22-01-2019 13:56	BMP-fil	4.051 KB


5. Turn off your Lunix 4K on the rear panel.

6. Insert the USB media into the USB port on the Lunix 4K

7. Turn on your Lunix 4K. Immediately after the box is turned on, an update message appears. Message appears only briefly.:



Press the red "Power" button on your remote control when message appears, update is started and you will see this screen:

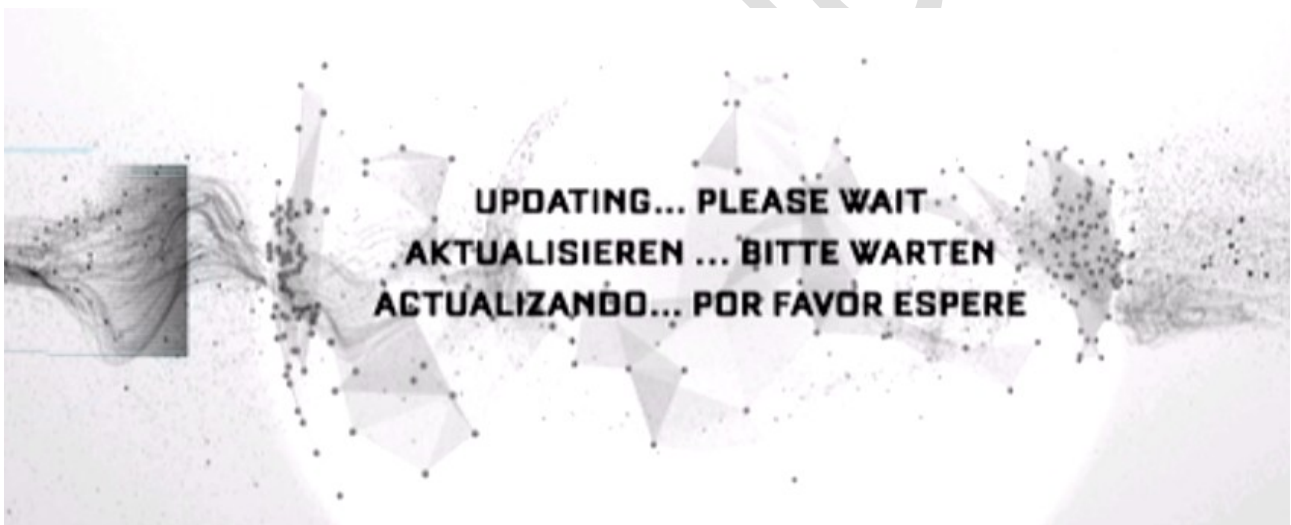

Wait until update is loaded. The box restarts as a completely fresh box with latest software. You can remove USB storage media when you see the language selection menu:

